
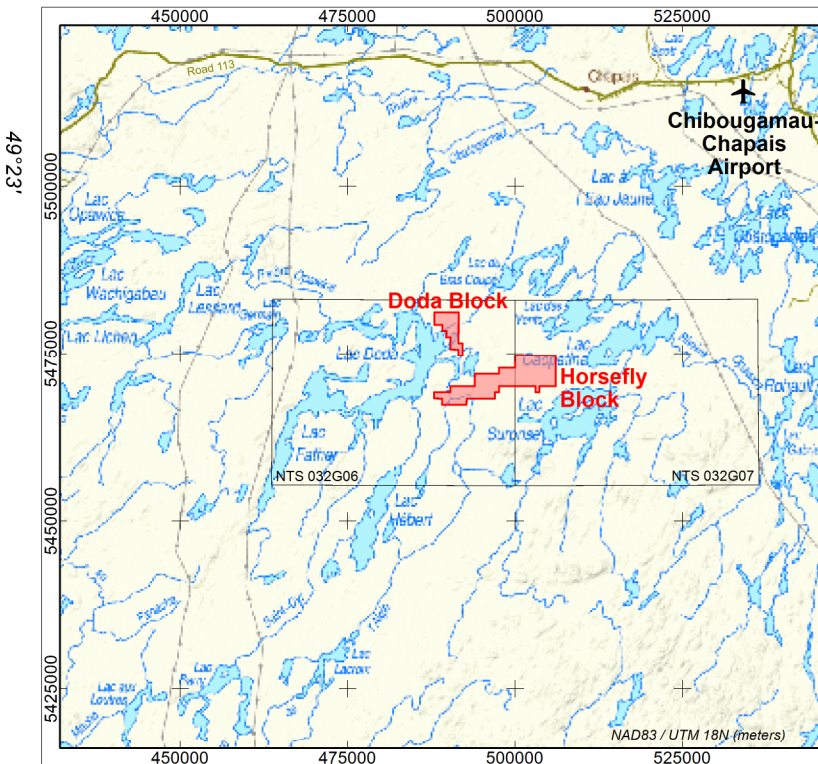


- Contours**
- Level 1 : 20 nT
  - Level 2 : 100 nT
  - Level 3 : 500 nT
- Legend**
- Topographic contours (15m)
  - Road, trail
  - Wetland
  - Water body
  - Water stream
  - Mineral claim
- Survey Specifications**
- Horsefly Block**
- Line spacing & orientation : 50 m & N000
  - Tie-line spacing & orientation : 500 m & N090
  - Average survey speed : 35.1 m/s
  - Average helicopter height : 38 m
  - Average Mag height : 17 m
- Doda Block**
- Line spacing & orientation : 50 m & N035
  - Tie-line spacing & orientation : 500 m & N125
  - Average survey speed : 35.4 m/s
  - Average helicopter height : 38 m
  - Average Mag height : 17 m
- Instrumentations**
- Helicopter : Eurocopter EC120B
  - Navigation & Acquisition : PicoEnvirotec AGIS
  - Real-Time DGPS : Omnistar
  - Magnetometer : Geometrics G-822A
  - Sampling rate : 10 Hz

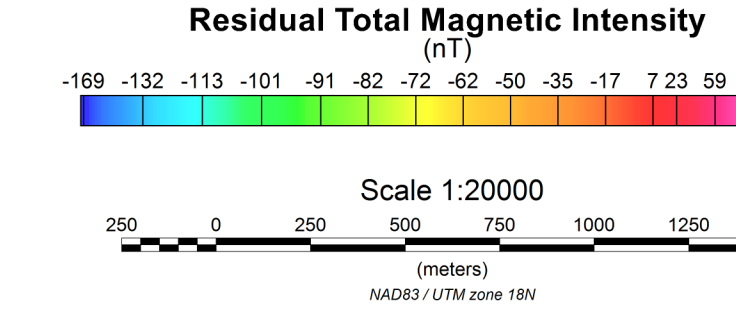

**VISIBLE GOLD MINES INC.**  
**Horsefly & Doda Projects, Québec, 2021**

**RESIDUAL TOTAL MAGNETIC INTENSITY**

**HIGH RESOLUTION MAGNETIC HELICOPTER SURVEY**  
 Flown by: **PROSPECTAR Geosurveys**

Compiled by: **Joël Dubé, P.Eng.**  
 Dynamic Discovery Geoscience